


CDI trolley



SI 40 satellite

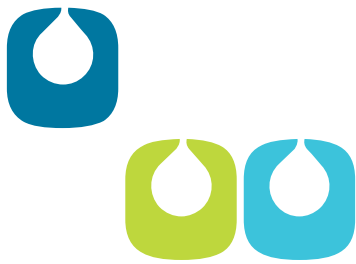

Satellite SI15-100



Easymousse



Application

- Foaming
- Medium pressure washing
- Spraying

Descriptive

Connected to a medium-pressure station (CL25 or CL40), the **CDI trolley** is a mobile solution fulfilling all the functions for a perfect and complete cleaning cycle : foaming, washing/rinsing, spraying.


Benefits

Robustness :

- Stainless-steel setting box
- Setting gears inside locking housing

Simplicity of use :

- Compact in size equipment
- Accurate setting and control of the foam quality

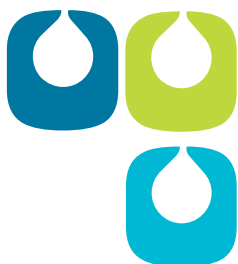

CDI trolley

Technical characteristics

Distribution satellites	Medium pressure si 40			Easymousse
Type	SINGLE Dosing 1 product	DOUBLE Dosing A choice of 2 products	DOUBLE Venturi A choice of 2 products or simultaneously	SINGLE Dosing 1 product
Material	Stainless-steel 304 L			Stainless-steel 304
Dimensions	Width: 520 mm Height: 1080 mm Depth: 1250 mm			Width: 520 mm Height: 1080 mm Depth: 1250 mm
Treatment	Chemically treated			Chemically treated
Wheels	2 fixed Ø 200 mm 1 directional with brake Ø 160 mm			2 fixed Ø 200 mm 1 directional with brake Ø 160 mm
Weight	67 kg			67 kg
Connecting Water input Air Input	Male 1/2" Ø 8			Female 3/8" Ø 8
Supply and pressure	Water: 15 to 64 bar Air: mini 6 bar			Water: 15 to 64 bar Air: mini 6 bar
Dosing	1 to 10 %			1 to 10 %
COMMON CHARACTERISTICS TO THE MACHINES <ul style="list-style-type: none"> > Space reserved for 2 cans of 30 litres > Straineless steel manual drum > Air pressure regulator and pressure gauge > Washing selection gate > Air selection gate > Setting of foam smoothness by air regulator > Non return valve 				

All our materials are tested at the factory and supplied with instructions for use.