


Eco line foam generators



Automousse
AM50 V GD

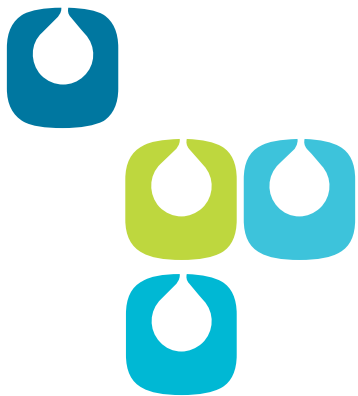

Série ÉCO
M50V GD



Série ÉCO
M24V GD

Application

- Foaming
- Spraying

Benefits

Economical :


- Economical solution for the cleaning and disinfection of the small and medium premises

Quality of the foam :

- Control over foam quality
- Precise adjustments of air and solution outflows

Ergonomics :

- Not bulky
- Gauge for the level
- Quality of the projection kit



Eco line foam generators

Technical characteristics

| Models | ECO LINE M24V GD | ECO LINE M50V GD | AUTOMOUSSE AM50V GD |
|-------------------------|--|--|--|
| Material | Stainless steel 304 | Stainless steel 304 | Stainless steel 304 |
| Treatment | Chemically treated and polished | Chemically treated and polished | Chemically treated and polished |
| Capacity | 24 L | 50 L | 50 L |
| Dimensions | Length: 340 mm Width: 300 mm Height: 800 mm | Length: 380 mm Width: 400 mm Height: 950 mm | Length: 585 mm Width: 440 mm Height: 1100 mm |
| Weight | 14 kg | 18 kg | 55 kg |
| Wheels | 2 fixed wheels ø 125 | 2 fixed wheels ø 175 | 2 fixed wheels ø 100 2 directional wheels ø 100 |
| Working pressure | Maximum: 4 bar | Maximum: 4 bar | Maximum: 4 bar |
| Air consumption | Continuous external air supply 7 Nm ³ /h | Continuous external air supply 7 Nm ³ /h | From built-in air compressor (cf insert) 7 Nm ³ /h |
| Outflow | Foaming: 4-5 l/mn Spraying: 3 l/mn | Foaming: 4-5 l/mn Spraying: 3 l/mn | Foaming: 4-5 l/mn Spraying: 3 l/mn |
| Option | Avail in 24 l capacity to commission | | |

STANDARD EQUIPMENT



- > Application gears:
 - 8 m long hose, ø 12, stainless steel crimping
 - 1/4 turn drain valve
 - stainless steel hose 500 mm
 - foam nozzle 65° stainless steel
- > 45° stainless steel spraying nozzle
- > 1/4 T draining valve
- > Stainless filling cap with built-in superpressure safety valve
- > Air reducing valve and control group
- > Air and solution outflow control
- > Dosing jug

SPECIFICITY AUTOMOUSSE AM50V GD

Air compressor



- Built-in air compressor inside stainless steel housing:
 - > Power: 220 V - 50 Hz
 - > 6 litre tank
 - > Sound level: 73 dB
 - > Stainless steel under frame with handle for convenience of prehension

All our materials are tested at the factory and supplied with instructions for use.