


SI 40 medium pressure satellite

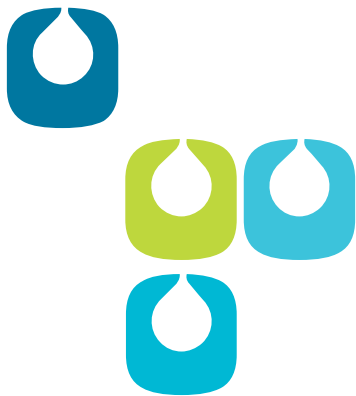

Application

- Foaming
- Medium pressure washing
- Disinfection

Specification

Put in the production workshops, the SI 40 medium pressure satellite connected to your air and water network allows you to carry out the washing, foaming and disinfection functions.

Performance

Robustness :

- 304 L stainless steel casing
- Easy adjustments
- Pressures display at the front

Easy to use :

- Compact equipment
- Precise adjustments and control over foam quality



SI 40 medium pressure satellite

Technical data

Models	SINGLE Dosing	DOUBLE Dosing	DOUBLE Venturi
	1 product	A choice of 2 products	A choice of 2 products or simultaneously
Material	304 L stainless steel	304 L stainless steel	304 L stainless steel
Treatment	Chemically treated	Chemically treated	Chemically treated
Dimensions	Width: 330 mm Height: 320 mm Depth: 130 mm	Width: 330 mm Height: 320 mm Depth: 130 mm	Width: 330 mm Height: 320 mm Depth: 130 mm
Weight	15 kg	15 kg	15 kg
Connections			
Water inlet	1/2" male	1/2" male	1/2" male
Air inlet	3/8" male	3/8" male	3/8" male
Supply and pressure	Water: 15 to 64 bar Air: min. 6 bar	Water: 15 to 64 bar Air: mini 6 bar	Water: 15 to 64 bar Air: mini 6 bar
Dosing	1 to 10 %	1 to 10 %	1 to 10 %
Concentration adjustment	By coloured inserts	By coloured inserts	By coloured inserts

All our materials are tested at the factory and supplied with instructions for use.