



SI 15-100 satellite

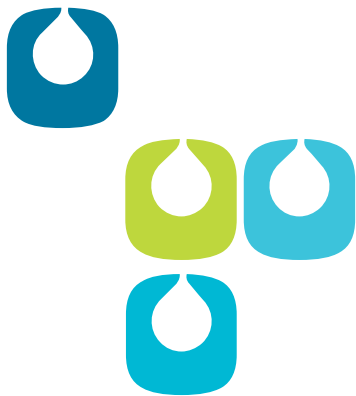

Applications

- Foaming
- Washing
- Disinfection

Descriptive

Put in the production workshops, the SI 15-100 satellite connected to your air and water network allows you to carry out the washing, foaming and disinfection functions.

Benefits

Reliability:

- Easy to use
- Easy to maintain

Performance:

- Choice of double dosing or simultaneous dosing
- Precise adjustments and control over foam quality
- Air pressure display

Quality:

- 304 L stainless steel robustness
- Compact in size
- Hygienic design

SI 15-100 satellite

Technical characteristics

Pressure	< to 25 bar	From 25 to 60 bar	> to 60 bar
Material	304 L stainless steel	304 L stainless steel	304 L stainless steel
Dimensions	140 x 155 x 93 mm	140 x 155 x 93 mm	140 x 155 x 93 mm
Weight	5 kg	5 kg	5 kg
Injector Ø	1,8 mm Ø	1,8 mm Ø	1,8 mm Ø
Connections water inlet: Compressed air inlet:	1/2" female 8 Ø	1/2" female 8 Ø	1/2" female 8 Ø
Supply and pressure	Water: 15 to 25 bar Air: 6 bar min.	Water: 25 to 60 bar Air: 6 bar min.	Water: > to 60 bar Air: 6 bar min.
Dosing	1 to 10%	1 to 10%	1 to 10%
Concentration adjustment	By coloured inserts	By coloured inserts	By coloured inserts
Quick coupler output	Male 1/2" or quick coupler	Male 1/2" or quick coupler	Male 1/2" or quick coupler

All our materials are tested at the factory and supplied with instructions for use.

Info

The equipment reference differs from the water supply pressure.