


H.P. mobile

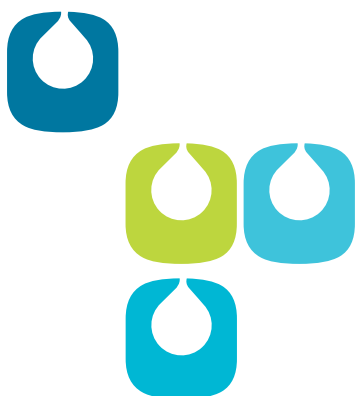

Application

- Foaming
- High pressure washing
- Disinfection

Description

3 H.P. mobile versions available:

- 17 L/min 100 bar
- 27 L/min 50 bar
- 27 L/min 100 bar

The product incorporation option is available on these 3 versions.

Benefits

- High pressure washing
- Nonstop foaming
- Nonstop spraying
- Stainless steel wader frame and casing
- Storage place for hoses
- Storage place for chemical cans
- Automatic start and stop
- Easy to use
- Precise adjustments and control over foam quality
- Easy to handle: 2 fixed wheels Ø125 at the back and 2 directional wheels Ø125 at the front.

H.P. mobile

Technical characteristics

Models	17 L/min - 100 bar	27 L/min - 50 bar	27 L/min - 100 bar
Pressure	100 bar	50 bar	100 bar
Flow rate	17 L/min	27 L/min	27 L/min
Engine	4 Kw 1500 tr/min	3 Kw 1500 tr/min	5,5 Kw 1500 tr/min
Dimensions	Length: 665 mm Width: 430 mm Height: 405 mm	Length: 800 mm Width: 505 mm Height: 405 mm	Length: 800 mm Width: 505 mm Height: 405 mm
Water network connection			
Inlet:	Brass quick coupler	Brass quick coupler	Brass quick coupler
Supply min. flow:	1,5 m ³ /h to 1 bar	2 m ³ /h to 1 bar	2 m ³ /h to 1 bar
Electrical connection	5 m cable (without plug) 3 phases 380 V	5 m cable (without plug) 3 phases 380 V	5 m cable (without plug) 3 phases 380 V
Compressed air connection <i>(for model with product incorporation)</i>	ø 9 fluted connector Min-flow: 7 Nm ³ /h to 6 bar	ø 9 fluted connector Min-flow: 7 Nm ³ /h to 6 bar	ø 9 fluted connector Min-flow: 7 Nm ³ /h to 6 bar
Start and stop	Automatic	Automatic	Automatic

All our equipment are tested at the factory and supplied with instructions for use.

Options :

- Product incorporation: venturi system / Air pressure adjustment / 1 can support
- 25 m stainless steel hose reel

Information

Make your projection kit : hoses...